




Our **Aluminum Concrete Beam Bucket** has many advantages:

- It is a simple, lightweight bucket that allows you to place concrete precisely where needed, directly into wall forms, or against re-bar.
- One gate to open ensures no jamming.
- Concrete discharges from the side-bottom.
- See exactly where you place your concrete.

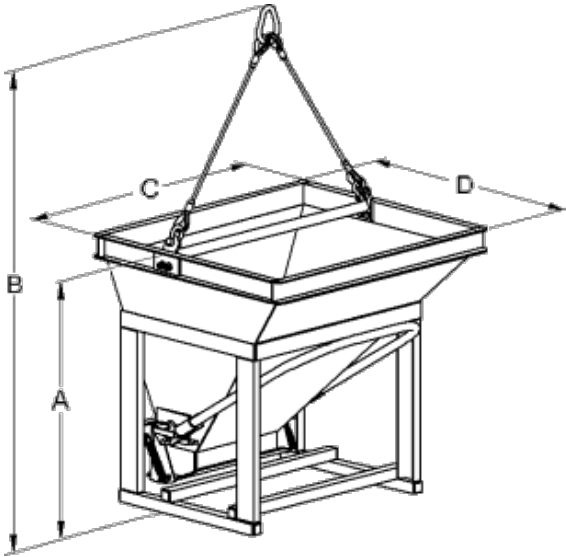

**Accessories for Aluminum Beam Buckets (optional):**

- Side Discharge Chutes: D-150, D-160
- Lifting Bale (instead of wire rope sling)
- Front Handle
- Forklift Attachment
- Plastic Liner

Side chutes and plastic liner are available for both new and used buckets. Lifting bale, front handle and forklift attachment are available for new buckets only at the time of order, as the buckets require modification to accept the accessories.

For more technical information go to Bucket Accessories page or contact us.

**Standard Aluminum Concrete Beam Buckets**

Model	Capacity			Loading Height	Lifting Height	Width	Depth	Gate Size	Weight	
	nominal		actual						pounds	kg
	yd <sup>3</sup>	m <sup>3</sup>	Cu. Ft.							
"A"	"B"	"C"	"D"							
SB-5	1/2	0.4	14	41"	83"	44"	37"	8" x 20"	200	90
SB-7	3/4	0.6	23	50"	90"	51"	45"	8" x 20"	230	105
SB-10	1	0.8	29	54"	109"	54"	47"	8" x 20"	260	120
SB-15	1-1/2	1.2	41	58"	110"	64"	54"	9" x 24"	340	155
SB-20	2	1.5	58	64"	123"	73"	61"	9" x 24"	500	230
SB-25	2-1/2	1.9	70	68"	126"	77"	65"	9" x 24"	530	240

Each bucket is complete with wire rope sling. Bucket weight includes wire rope sling.  
 We reserve the right to make specification, equipment and price changes without notice.